

OFFICIAL

# South Australia's River Murray Annual Operating Plan 2023-24



**Government  
of South Australia**

Department for  
Environment and Water

OFFICIAL

# Foreword

The Department for Environment and Water acknowledges and pays respect to the Traditional Owners and First Nations of the Murray-Darling Basin, who have a deep cultural, social, environmental, spiritual and economic connection to their lands and waters.

*South Australia's River Murray Annual Operating Plan 2023-24* is the key document that guides transparent and coordinated River Murray operational decisions in South Australia during the 2023-24 water year. It draws on flow outlooks for the upcoming water year provided by the Murray-Darling Basin Authority to identify how the River Murray in South Australia may be operated under a number of potential water availability scenarios to balance the benefits to all water users, including water for the environment.

Together with South Australia's Objectives and Outcomes for Operating the River Murray in South Australia, the annual operating plan contributes to meeting objectives and requirements in the Basin Plan, the *2023-24 Water for the Environment Annual Plan for the South Australian River Murray* and the *Australian Drinking Water Guidelines*.

In 2022-23, South Australia experienced its highest River Murray flood in more than 60 years, new information and learnings from the event are reflected in this year's documents where relevant. For the 2023-24 water year, the Bureau of Meteorology has forecast the return of El Niño in late winter, which indicates that drier conditions across the Murray-Darling Basin may be experienced during spring and summer.

I would like to thank all those who have been involved in the ongoing development and annual review of the annual operating plan for the 2023-24 water year, particularly members of the River Murray Operations Working Group and the Murray-Darling Basin Authority.

**Sue Hutchings, Acting Executive Director, Water and River Murray**  
Department for Environment and Water

# Contents

<b>Foreword .....</b>	<b>2</b>
<b>1 Introduction .....</b>	<b>5</b>
<b>2 Resource conditions at commencement of 2023–24.....</b>	<b>7</b>
2.1 Murray-Darling Basin inflows during 2022-23.....	7
2.2 MDB Storages at 1 July 2023.....	9
2.3 MDB Water Sharing Arrangements.....	9
2.4 South Australia’s Water Resource Availability and Allocation.....	9
2.5 South Australia’s Storage Right.....	10
2.6 Water Level and Salinity Conditions.....	10
<b>3 Annual Outlook for 2023-24.....</b>	<b>13</b>
3.1 Bureau of Meteorology Climate Outlook.....	13
3.2 MDBA Inflow Scenarios for 2023-24.....	14
3.2.1 Entitlement Flow.....	15
3.2.2 Unregulated Flow.....	15
3.2.3 Additional Dilution Flow (ADF).....	15
3.2.4 Shortfall.....	15
3.2.5 Salinity.....	16
<b>4 Operating considerations for 2023-24.....</b>	<b>18</b>
4.1 Conditions Outside the Manageable Flow Range.....	18
4.1.1 High Flow and Flood.....	18
4.1.2 Low Water Availability.....	18
4.1.3 Shortfall.....	18
4.2 Environmental Water Delivery .....	18
4.3 Weir Pool Manipulations.....	21
4.4 Lake Victoria Directed Release.....	21
4.5 Lower Lakes, Coorong and Murray Mouth Operations.....	22
4.6 Water Quality.....	22
4.7 Deferral, Storage and Delivery of South Australia’s Storage Right.....	23
4.7.1 Deferral.....	23
4.7.2 Delivery.....	23
<b>5 Glossary of Terms Used .....</b>	<b>24</b>
<b>6 Glossary of Acronyms Used .....</b>	<b>25</b>
<b>7 References .....</b>	<b>27</b>

## List of Figures

Figure 1. Maximum temperature across Australia and rainfall in Murray Darling Basin 1 July 2022- 30 June 2023 .....	7
Figure 2. River Murray System Inflow (excluding inflow to Menindee and Snowy Scheme) recent years, long-term average and average over the last 10 years.....	8
Figure 3. Inflows to Menindee Lakes in recent years, long-term average and average over last 10 years.....	8
Figure 4. Salinity and water levels across Lock 6, Morgan, Murray Bridge and Milang from 1 July 2022 to 1 July 2023 .....	10
Figure 5. Lower Lakes average water and salinity levels from 1 July 2022 to 1 July 2023 .....	11
Figure 6. North Lagoon salinity levels from 1 July 2022 to 30 June 2023 .....	11
Figure 7. South Lagoon salinity levels from 1 July 2022 to 30 June 2023 .....	12
Figure 8. BOM Rainfall outlook from August to October 2023.....	13
Figure 9. BOM Maximum temperature outlook from August to October 2023.....	13
Figure 10. Flow to South Australia outlook from 1 June 2023 to 31 May 2024 (MDBA 2023).....	15
Figure 11. Annual operating outlooks provided by the MDBA in May 2023.....	19

## List of Tables

Table 1. Storage Volumes across MDB at 1 July 2023 .....	9
Table 2. Volume of deferred water held in the South Australian Storage Right at 1 July 2023 .....	10
Table 3. Salinity Outlook – Summary of maximum modelled salinity for each flow scenario compared to the Basin Plan maximum salinity threshold (paragraph (5)(c) of Section 9.14 of the Basin Plan) .....	17
Table 4. Environmental watering proposals submitted to the MDBA and/or the CEWO for 2023-24 .....	20
Table 5. Indicative volume of environmental water required per month to deliver South Australia multi-site actions. Options under each scenario represent alternative demand profiles and are not cumulative .....	20
Table 6. Proposed manipulations for each weir pool in 2023-24 under the different AOO scenarios as set out in the WFTE Annual Plan. ....	21

# 1 Introduction

*South Australia's Annual Operating Plan 2023-24* (SA AOP) is prepared annually by the Department for Environment and Water (DEW). It identifies how the River Murray in South Australia may be operated for the current water year under a number of potential water availability scenarios (also referred to as inflow scenarios) to balance the benefits to all water users, including water for the environment (WFTE).

The SA AOP aligns with the [Objectives and Outcomes for Operating the River Murray in South Australia](#) (SA O&O) (DEW 2021) which aims to achieve some of the specific objectives in the [Basin Plan](#) (MDBA 2012). The SA AOP has regard for the SA O&O under a range of climate and inflow scenarios and identifies the objectives and outcomes sought for the River Murray and its water users. Where actions fall within normal operating parameters, they will be undertaken routinely. Where a proposed action falls outside normal operating parameters, additional approvals will be sought from the relevant authority. Some actions within normal operating parameters may also require approval.

The SA AOP also contributes to meeting objectives in the [Long-term environmental watering plan for the South Australian River Murray water resource plan area](#) (LTWP) (DEW 2020), the [2023-24 Water for the Environment Annual Plan for the South Australian River Murray](#) (WFTE Annual Plan) (DEW 2023), and the [South Australian River Murray Water Resource Plan](#) (DEW 2019a) for areas including the Coorong and Murray Mouth. It also guides operations to help ensure they are consistent with the [Australian Drinking Water Guidelines](#) (National Health and Medical Research Council 2011) and that South Australia meets its obligations for the protection of WFTE.

Annual updates of the SA AOP are reviewed by the River Murray Operations Working Group (RMOWG). This is a cross-agency group consisting of representatives with an interest in how the River Murray is managed and operated in South Australia and includes representatives from:

- DEW
- SA Water
- Primary Industries and Regions SA
- Environment Protection Authority
- Commonwealth Scientific and Industrial Research Organisation.

The SA AOP is informed by the flow outlook scenarios contained in the Murray-Darling Basin Authority's (MDBA) [River Murray System Annual Operating Outlook](#) (AOO) (MDBA 2023) for the 2023-24 water year. The AOO receives input from the Australian, New South Wales (NSW), Victorian and South Australian Governments through the Water Liaison Working Group (WLWG). It should be noted that the MDBA uses a water year of 1 June to 31 May, whereas South Australia defines its water year as 1 July to 30 June.

The SA AOP uses the six inflow scenarios of the AOO, being 'extreme dry', 'very dry', 'dry', 'moderate', 'near average', 'wet' to inform water delivery operations in South Australia.

The MDBA provides monthly water resource updates to the Basin Officials Committee (BOC) and the WLWG. The MDBA also undertakes a midyear review of its AOO. Following receipt of the midyear AOO from the MDBA, the SA AOP may be updated (if necessary), for example, if there is a significant change in water resource conditions.

If dry conditions cause the water level in the River Murray below Lock 1 to fall below 0.4 metres (m) Australian Height Datum (AHD), River Murray operations in South Australia will be consistent with the [Drought Emergency Framework for Lakes Alexandrina and Albert](#) (MDBA 2014) to the extent that is practicably possible.

It is important to note that the actual conditions that occur during the 2023-24 water year will differ from the inflow scenarios described in the SA AOP, therefore river operations may vary from the projections in this document. This is in-part driven by the Murray-Darling Basin's highly variable climate where one month can be wet followed by a month of dry. The actual pattern of environmental water delivery during the 2023-24 water year is also uncertain and variable, which may significantly change the distribution pattern provided in the scenarios. Nevertheless, the scenarios provide a useful indication of potential flow to South Australia during the 2023-24 water year. Ongoing decisions made during the year regarding river operations within South Australia will be consistent with the SA AOP and current operating policies and procedures as agreed under [South Australia's Prerequisite Policy Measures](#) approved by the MDBA.

The main focus of the SA AOP is to guide key processes to achieve the best outcomes for the State (economic, environmental and social), deliver a portion of South Australia's deferred water for Critical Human Water Needs (CHWN) and private carryover if required, seek opportunities to defer additional water should the conditions improve, and have regard for the Basin Plan targets and outcomes.


## 2 Resource conditions at commencement of 2023–24

### 2.1 Murray-Darling Basin inflows during 2022-23

Murray-Darling Basin inflows during 2022-23 continued to be influenced by a La Niña event which developed during spring 2021 and continued until March 2023. La Niña conditions were also experienced during 2021-22, making 2022-23 the third consecutive La Niña year.

The River Murray System (southern Basin) and the Darling River (northern Basin) experienced varied rainfall depending on location within the basin. Large areas of NSW received above average to very much above average rainfall over 2022-23. The Lower Murray, including the length of the River Murray in South Australia, experienced above average to very much above average rainfall across 2022-23. The Upper Murray at the headwaters of the Southern Connected Basin experienced average to above average rainfall across the year (**Figure 1**).

Temperatures were average to below average across the Lower Murray and over some areas of the Upper Murray. In contrast some areas in mid NSW experienced very much below average to below average temperatures in 2022-23. The remainder of the Southern Connected Basin experienced average temperatures in 2022-23 (**Figure 1**).

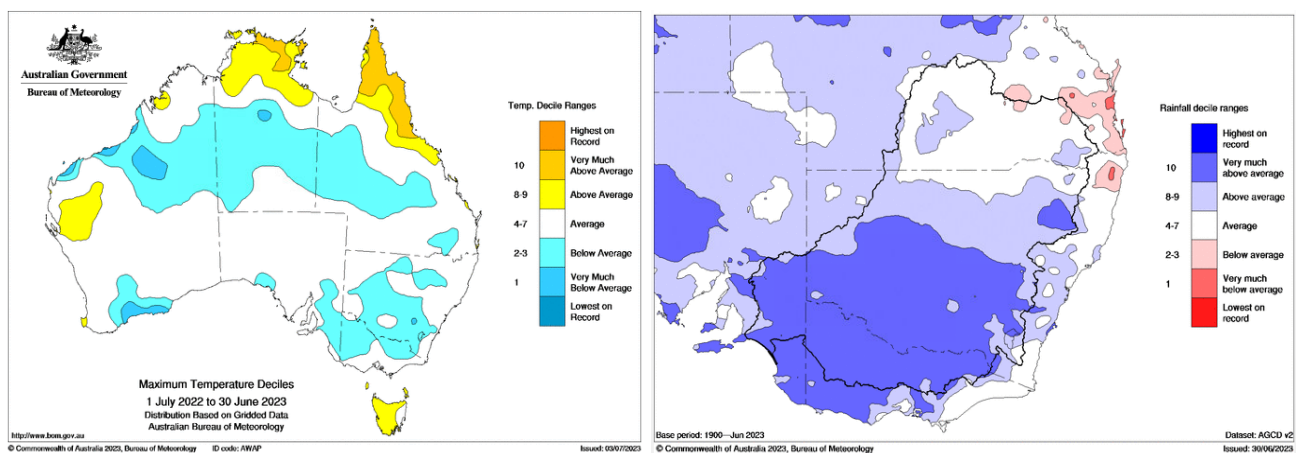


**Figure 1. Maximum temperature across Australia and rainfall in Murray Darling Basin 1 July 2022- 30 June 2023**

(Sources: <http://www.bom.gov.au/jsp/awap/temp/index.jsp> & <http://www.bom.gov.au/climate/maps/rainfall/?variable/>)


In 2022-23, River Murray System inflow (excluding Menindee, Snowy Mountains Scheme, Inter-valley Transfers and environmental water inflow) was approximately 23 384 GL which is more than double the volume recorded for 21-22 and around 13 404 GL more than the long-term median inflow volume (**Figure 2**).

The inflow to the River Murray System exceeded the long-term average for most of the 2022-23 water year.

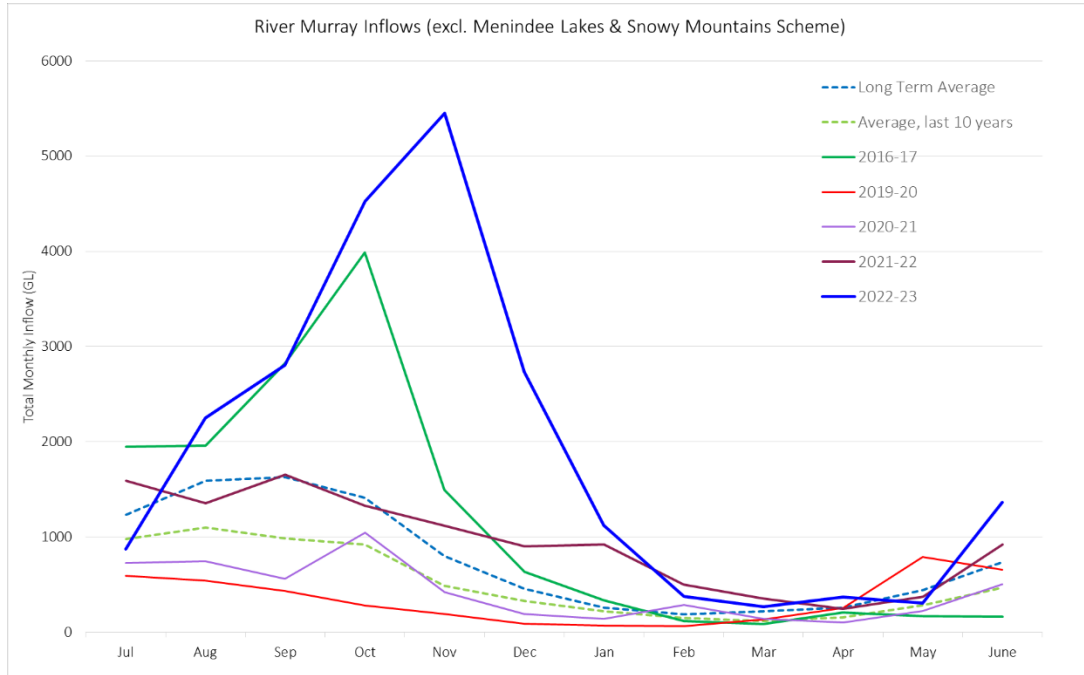

**Figure 2. River Murray System Inflow (excluding inflow to Menindee and Snowy Scheme) recent years, long-term average and average over the last 10 years**

In 2022-23, Menindee Lakes inflow was approximately 6 218 GL. Comparatively in 2021-22, the inflow was approximately 5 055 GL. Menindee Lakes long-term annual average inflow is around 2 080 GL (**Figure 3**).

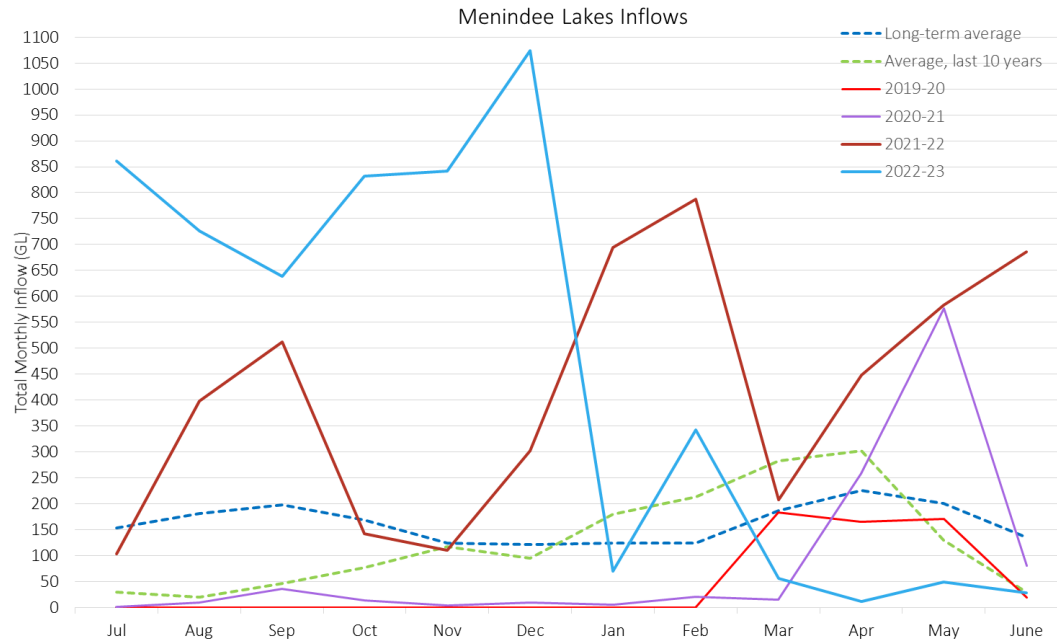

**Figure 3. Inflows to Menindee Lakes in recent years, long-term average and average over last 10 years**



## 2.2 MDB Storages at 1 July 2023

The water availability for the River Murray System and associated catchments (Murrumbidgee, Goulburn and Darling) at 1 July 2023 is identified in **Table 1**.

**Table 1. Storage Volumes across MDB at 1 July 2023**

	Total capacity (GL)	Active capacity (GL)	Water in storage (GL)	Percentage of total capacity %
<b>River Murray Storage (MDBA Controlled)</b>				
Dartmouth Reservoir	3 856	3 785	3 682	96%
Hume Reservoir	3 005	2 982	2 895	97%
Lake Victoria	677	577	499	73%
Menindee Lakes*	1 731	1 251	1 431	83%
<b>Total</b>	<b>9 269</b>	<b>8 595</b>	<b>8 507</b>	<b>92%</b>
Long term average at 1 July			6 174	67%
* When Menindee Lakes volume falls below 480 GL the resource is controlled by NSW. **When the volume next exceeds 640 GL it reverts back to MDBA control. *** Menindee Lakes can be surcharged above 1,731 GL (100% capacity)				
<b>Murrumbidgee Storage (NSW Controlled)</b>				
Burrinjuck Reservoir	1 026	1 023	963	94%
Blowering Reservoir	1 631	1 607	1 511	93%
<b>Goulburn Storage (Victoria Controlled)</b>				
Eildon Reservoir	3 334	3 234	3 253	98%

## 2.3 MDB Water Sharing Arrangements

As at 1 July 2023, the MDBA declared that the River Murray System will fall under [Tier 1 water sharing conditions](#) as described in the Murray-Darling Basin Agreement (the Agreement). This indicates that normal water sharing arrangements will be put in place. Tier 1 water sharing operates when enough water is available for CHWN (NSW 61 GL, Victoria 77 GL and South Australia 204 GL) and conveyance water (1 596 GL).

Under Tier 1, a conveyance reserve of 225 GL is required to be set aside by the MDBA to ensure that conveyance water can be met in the following year. The full conveyance reserve for 2023-24 has been set aside.

## 2.4 South Australia's Water Resource Availability and Allocation

The MDBA's Water Resource Assessment provided in April 2023 advised that South Australia would receive the full SA Entitlement of 1 850 GL (as defined in clause 88 of the Agreement) in 2023-24 under all water resource assessment scenarios, including with worst case inflows.

Accordingly, the [opening allocation](#) for South Australian River Murray irrigators for the 2023-24 water year was 100 per cent.

## 2.5 South Australia's Storage Right


On 1 July 2023, South Australia had a total of 0 GL of deferred water stored in accordance with Schedule G of the Agreement, as shown in **Table 2**. In October 2022 due to the unprecedented increased flows in the Murray-Darling Basin the 336.2 GL of South Australia's deferred water spilled in accordance with Schedule G of the Agreement stating that South Australia's Storage Right is the first to spill when dam storages begin pre-releases or spill. The 2023-24 water year will be used to rebuild South Australia's Storage Right. The latest version of the Deferred Water Storage and Delivery Plan can be accessed via this link: <https://www.environment.sa.gov.au/topics/river-murray/river-management-information/south-australias-storage-right>

**Table 2. Volume of deferred water held in the South Australian Storage Right at 1 July 2023**

	Lake Victoria (GL)	Hume (GL)	Dartmouth (GL)	Total (GL)
<b>CHWN</b>	0.0	0.0	0	0
<b>Private Carryover</b>	0.0	0.0	0	0
<b>Total</b>	0.0	0.0	0	0

## 2.6 Water Level and Salinity Conditions

During 2022-23, salinity remained below Basin Plan target levels at Lock 6, Morgan, Murray Bridge and Milang. Salinity levels measured at these four key sites did increase following the recession of the 2022 flood, however they remained below target levels.

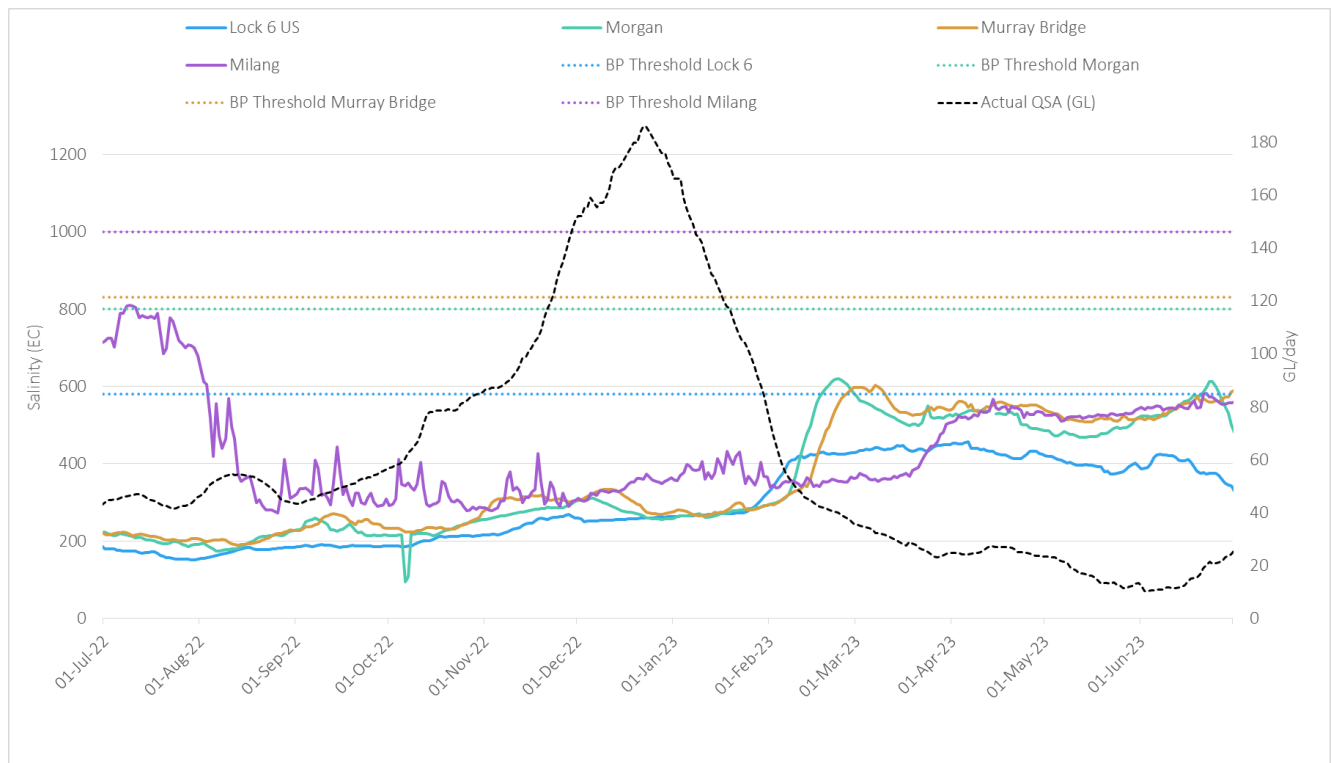


**Figure 4. Salinity and water levels across Lock 6, Morgan, Murray Bridge and Milang from 1 July 2022 to 1 July 2023**

Lake-averaged salinity and water level for Lake Alexandrina and Lake Albert during 2022-23 are shown in **Figure 5**. The average salinity ranged between 246 EC and 630 EC in Lake Alexandrina and 580 EC and 1 338 EC in Lake Albert. Lake Alexandrina water levels were in a range of 0.52 m AHD to 1.22 m AHD. Lake Albert water levels were in a range of 0.45 m AHD and 1.19 m AHD. The maximum water levels reached in both lakes was due to flooding and a limited head difference between the Lower Lakes and the Coorong, meaning that limited water was flowing out of the barrages even though gates were open.


The following gauges are used to inform the figures below:

- **Lake Albert:** A4261155 Lake Albert 2km North Warringe Point, A4260630 Lake Albert at Meningie Sailing Club Jetty, A4261153 Lake Albert Near Causeway at Waltowa Swamp.
- **Lake Alexandrina:** A4260574 Lake Alexandrina near Mulgundawa, A4260524 Lake Alexandrina at Milang Jetty, A4260575 Lake Alexandrina at Poltalloch Plains, A4261156 Lake Alexandrina 3km West Point McLeay, A4261133 Lake Alexandrina at Beacon 97.

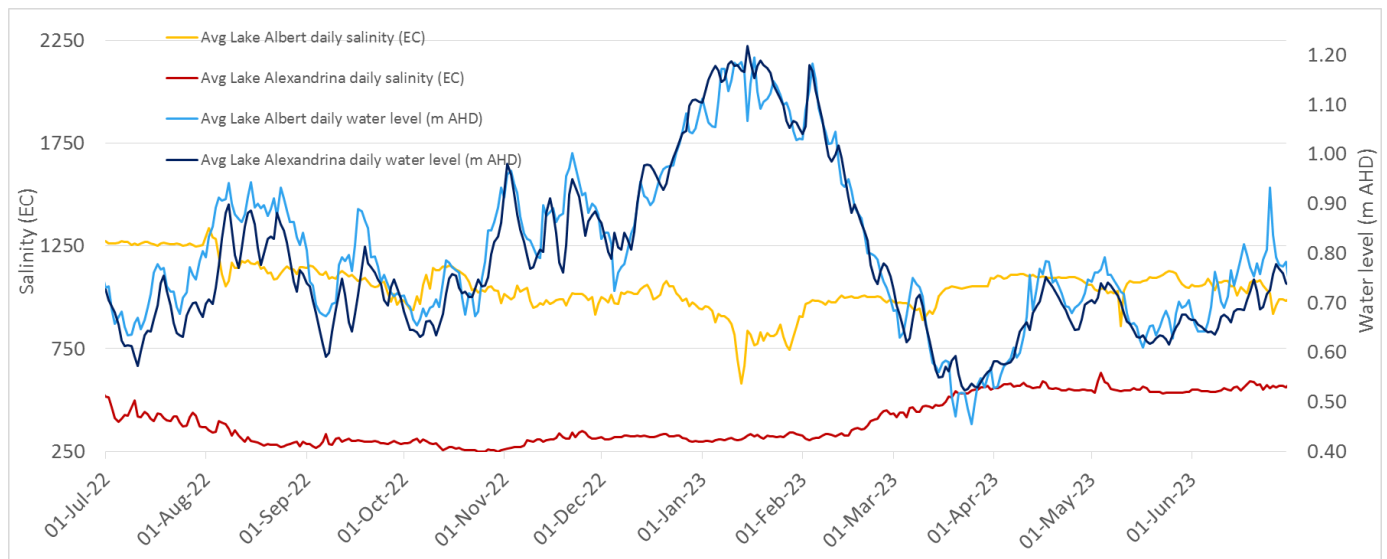

**Figure 5. Lower Lakes average water and salinity levels from 1 July 2022 to 1 July 2023**

Salinity levels in the North Lagoon remained within target levels during 2022-23 and were between 3 ppt and 27 ppt (Figure 6). In the South Lagoon salinity levels stayed well below the upper salinity threshold, however for 83 % of the time they were below the lower salinity threshold of 60 ppt. This was largely due to the volume of fresh water entering the Coorong due to prolonged high flows. Salinity thresholds in the South Lagoon were between 41 ppt and 69 ppt (**Figure 7**).

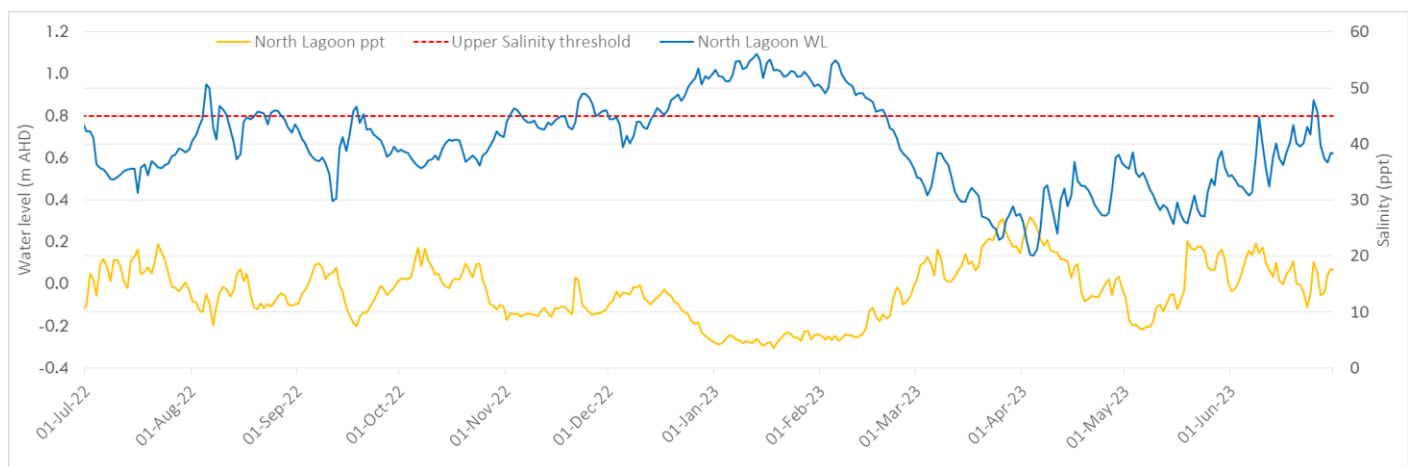

**Figure 6. North Lagoon salinity levels from 1 July 2022 to 30 June 2023**


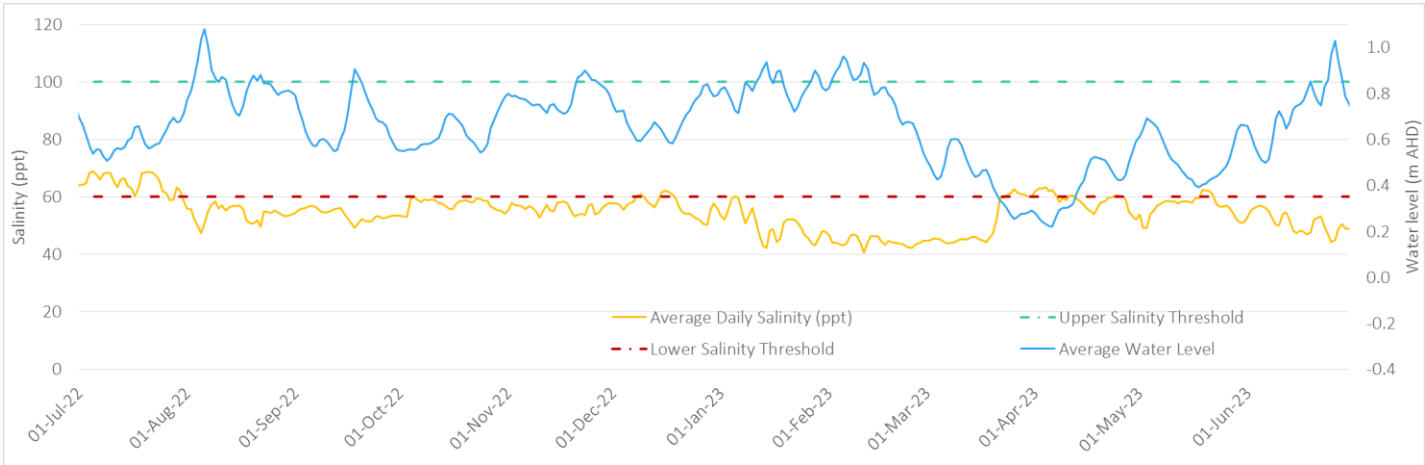


Figure 7. South Lagoon salinity levels from 1 July 2022 to 30 June 2023


## 3 Annual Outlook for 2023-24

### 3.1 Bureau of Meteorology Climate Outlook

In July 2023, the Bureau of Meteorology's (BOM) three-month climate outlook indicated a low likelihood of exceeding median rainfall across the Murray-Darling Basin, with a high likelihood of exceeding median maximum temperatures. An El Niño Watch was also declared in July 2023, indicating a 50 % chance (double the normal likelihood) of El Niño forming later in 2023, increasing the likelihood of less than average winter and spring rainfall across much of the Basin.

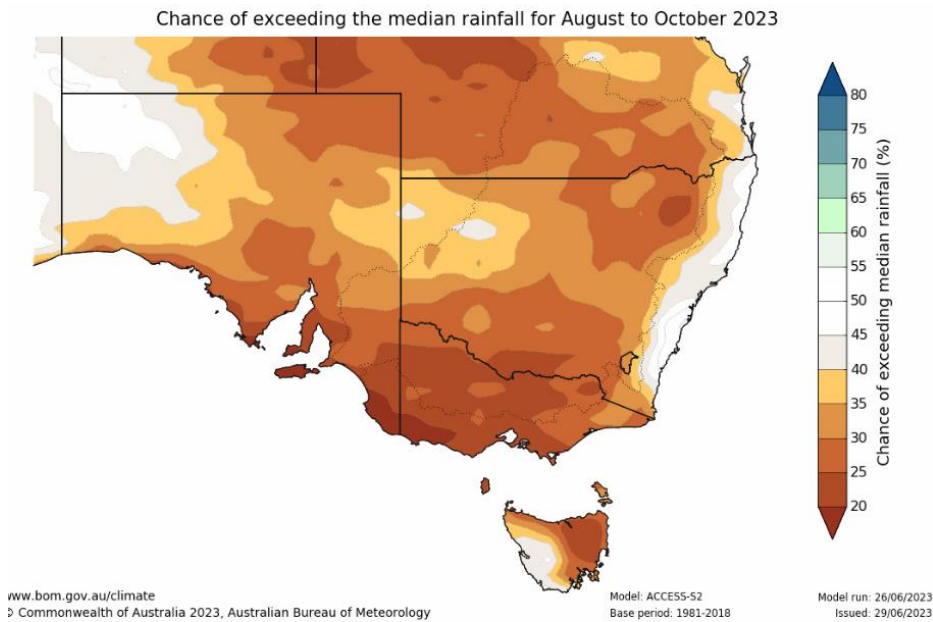

**Figure 8. BOM Rainfall outlook from August to October 2023**

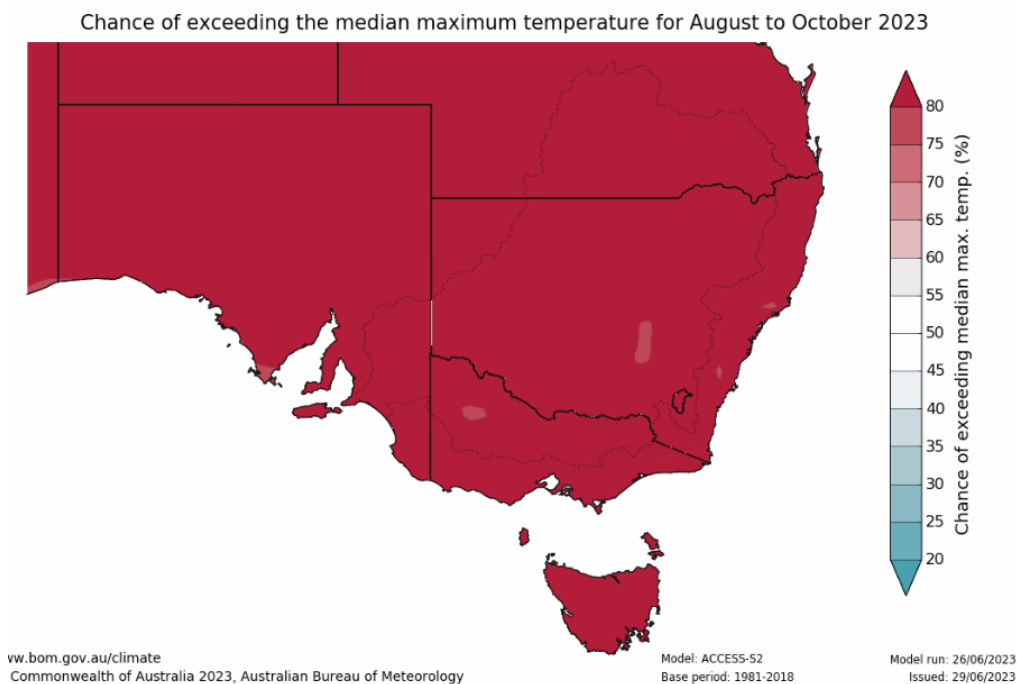

**Figure 9. BOM Maximum temperature outlook from August to October 2023**

### 3.2 MDBA Inflow Scenarios for 2023-24

The overall water availability for the River Murray System is determined by the MDBA at the start of each water year (1 June, which is different to South Australia's water year, which starts 1 July) and then at least monthly during the year.

It is not possible to accurately determine inflows to the River Murray System in advance, so the MDBA AOO defines six different inflow scenarios that cover the likely range of conditions that may be experienced during 2023-24. These scenarios are then used to guide general river operations and management actions that may be undertaken. River Murray System inflow scenarios are included in the SA AOP because they form the basis of the outlook for flow to South Australia.

At each assessment point throughout the water year, the volume of water available under the extreme dry and dry inflow scenarios will be progressively allocated to the States. The other scenarios are used to provide indicative quantities of water available to the States to assist in annual planning and management by water managers and customers, should those wetter scenarios eventuate.

As of late June 2023, most upper Murray system catchments are relatively wet and responsive to rainfall following a very wet inflow year in 2022-23 and consistent above average rainfall continuing in early winter. Based on the BOM's current climate outlook a 'very dry' scenario has been included for the MDBA AOO instead of the 'very wet' scenario. This is likely to better reflect the range of operational conditions that may eventuate in 2023-24. This includes the likelihood for high demands, noting particularly the very high volume of water in headwater storages at the start of the water year, and development of hot and dry conditions into summer. However, if climatic drivers change substantially such that much wetter conditions continue, the scenarios in this outlook may be revised.

The six 2023-24 River Murray System inflow scenarios exclude inflow from the Menindee Lakes, Snowy Scheme, inter-valley trade deliveries and WFTE deliveries from tributaries. These inflow scenarios trend from the June 2023 observed inflows in the 11th percentile (1 370 GL), to historic inflow percentiles. The six scenarios are as follows (taken from MDBA AOO):

1. **Extreme dry** scenario assumes annual River Murray System inflows of 3 920 GL, with inflows that recede to historic minimum inflows for the remainder of 2023-24. This is greater than the Basin Plan 2012 'worst case' inflows scenario of 650 GL. The extreme dry scenario reflects the inflows observed in June with a realistic trend to extreme dry conditions. The Basin Plan 'worst case' scenario is not viable in 2023-24.
2. **Very Dry** scenario assumes annual River Murray System inflows of 5 000 GL, with inflows that recede to the 95 th percentile inflows for remainder of 2023-24.
3. **Dry** scenario assumes annual River Murray System inflows of 5 960 GL, with inflows that recede to the 90 th percentile inflows for remainder of 2023-24.
4. **Moderate** scenario assumes annual River Murray System inflows of 7 620 GL, with inflows that recede to the 75 th percentile inflows for remainder of 2023-24.
5. **Near average** scenario assumes annual River Murray System inflows of 10 980 GL, with inflows that recede to the 50 th percentile inflows for remainder of 2023-24.
6. **Wet** scenario assumes annual River Murray System inflows of 17 190 GL, with inflows that recede to the 25 th percentile inflows for remainder of 2023-24.

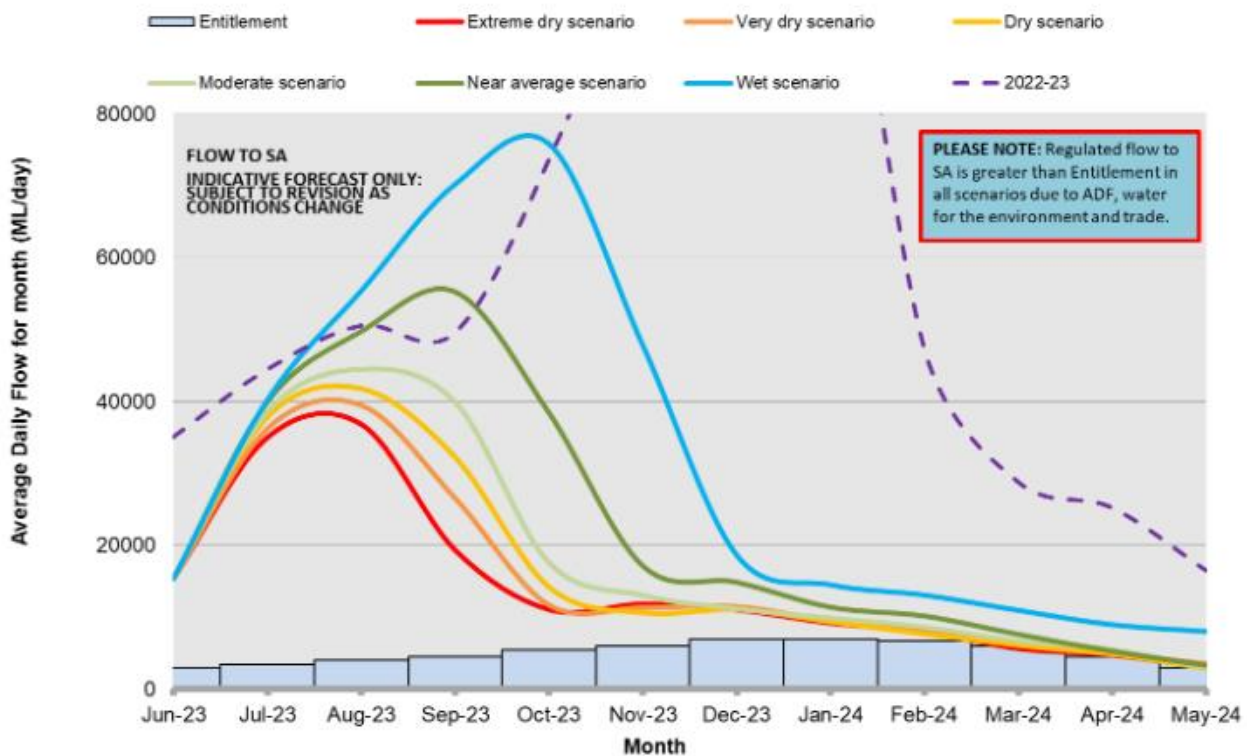


Figure 10. Flow to South Australia outlook from 1 June 2023 to 31 May 2024 (MDBA 2023)

### 3.2.1 Entitlement Flow

Consistent with the MDBA's water resource assessment, all AOO scenarios have South Australia receiving its full Entitlement Flow in 2023-24.

### 3.2.2 Unregulated Flow

Any unregulated flow entering South Australia will be used in accordance with the principles outlined in the [Water Allocation Plan for the River Murray Prescribed Watercourse](#) (Murraylands and Riverland Landscape Board 2021). The WFTE Annual Plan (DEW 2023) outlines potential environmental uses for unregulated flows in South Australia.

In the extreme dry inflow scenario, unregulated flow is not expected to occur.

In the dry and moderate inflow scenarios, modest volumes of unregulated flow may result through small inflow events from upstream.

In the near average, wet and very wet inflow scenarios, large upstream inflow events may result in prolonged unregulated flow. Under the wetter scenarios, there could be a significant flood along the River Murray in South Australia.

### 3.2.3 Additional Dilution Flow (ADF)

Additional Dilution Flow (ADF) to South Australia is triggered in all scenarios and will also guide timing (if the volume of water in the Menindee Lakes is above 1 300 GL during September) and releases from Menindee Lakes. ADF continues until December in the driest case and continues throughout 2023-24 in the wet cases.

### 3.2.4 Shortfall

The Department for Environment and Water is developing a water delivery shortfall management plan for South Australia. The purpose of this plan is to describe the risk of a shortfall impacting South Australia and to outline the approach for managing an event, should it occur.



A 'system shortfall' occurs when the combined capacity of the system is unable to supply all downstream requirements over the full season. Based on the inflow scenarios for the 2023-24 water year, high storage in Lake Victoria, the availability of Menindee Lakes and Inter Valley Trades, the risk of a system shortfall is less likely to occur this year, particularly in the scenarios where Menindee Lakes continues as a part of the River Murray resource throughout 2023-24, which occurs in all but the 'extreme dry' scenario.

A 'delivery shortfall' occurs when actual water use is higher than it was forecast to be when river water is released from storages, weeks earlier, to meet the forecast needs for irrigation and WFTE. The availability of Menindee Lakes reduces required transfers from Hume, potentially lowering river levels along the Murray upstream of the Darling junction. Lower flows provide less buffer against short-term spikes in demand, elevating the risk of delivery shortfall. Avoiding a delivery shortfall upstream of the Darling junction will be a focus of MDBA operations over summer. However, this is unlikely to be a risk for water delivery to South Australia due to the buffering capacity of Lake Victoria and likelihood of receiving bulk water transfers from Menindee Lakes. In addition, the unallocated portion of the SA entitlement provides a buffer against short-term spikes in demand.

The basis of the South Australian Shortfall Management Plan will be a series of three management tiers with associated triggers and actions. The key objective of each tier is outlined below and the reduction in demand from the first and second tier options is likely to be sufficient to manage a shortfall at the South Australian border in all but the most extreme situations:

- First tier – no impact on water users (e.g. surcharge weir pools prior event, delay delivery of unallocated Entitlement)
- Second tier – delay delivery to those water users or purposes with an identified flexibility to manage a short delay (e.g. reduce delivery of SA held environmental water, dilution flow, transfers from the River Murray to major water supply storages)
- Third tier – temporary restriction on extractions for most water users using the powers of the Landscape South Australia Act 2019.

Full South Australian Entitlement has been secured for 2023-24 under normal water sharing arrangements and has been allowed across all scenarios. Additional Dilution Flow (ADF) to SA will be triggered in September 2023, increasing Entitlement by 3 GL/day, and continue while storage triggers are met. In all scenarios, EWHs are planning to use environmental entitlements to increase summer and autumn flows across the SA border for ecological outcomes in the lower Murray to the sea.

### 3.2.5 Salinity

Salinity naturally occurs in the River Murray System but can be exacerbated by land and river management practices. A range of measures commenced more than three decades ago are helping to keep river salinity under control. However, during droughts, salinity in the lower Murray downstream of Lock 1 and in the Darling River, in particular, can increase and begin to impact water supply for human consumption, industries, and the environment. The likelihood of a high salinity event is low if river flows remain at or above Entitlement Flow. Nonetheless, prolonged inundation of floodplains can induce an increase in the rate of discharge of saline groundwater to the main river channel. This risk is greatest when there is a rapid return to Entitlement Flow following floodplain inundation.

A summary salinity outlook using modelled salinity for each flow scenario indicates that salinity is predicted to remain below the Basin Plan Salinity Targets (**Table 3**). The salinity outlook provides a range of likely river salinities over the outlook period. The model outputs should not be relied upon as absolute values but more so as an indication of the relative change between outlook scenarios.



**Table 3. Salinity Outlook – Summary of maximum modelled salinity for each flow scenario compared to the Basin Plan maximum salinity threshold (paragraph (5)(c) of Section 9.14 of the Basin Plan)**

Site	BP Target Value (EC)*	Maximum modelled salinity (EC)				Total No. days over BP maximum salinity threshold (for the 75% of AEP scenario)			
		90% AEP	75% AEP	50% AEP	25% AEP	580 EC	800 EC	830 EC	1000 EC
<b>River Murray at Lock 6</b>	580	192	189	189	187	0			
<b>River Murray at Morgan</b>	800	296	295	295	294		0		
<b>River Murray at Murray Bridge</b>	830	346	345	345	345			0	
<b>Lake Alexandrina at Milang</b>	1000	693	692	691	691				0

\* Paragraph (5)(c) of Section 9.14 of the Basin Plan states that *“the levels of salinity at the reporting sites set out in the table should not exceed the values set out in the table, 95% of the time”*

## 4 Operating considerations for 2023-24

### 4.1 Conditions Outside the Manageable Flow Range

#### 4.1.1 High Flow and Flood

During 2022-23 SA experienced its most significant flood event in 60 years. On 23 December 2023 flow into the SA River Murray peaked at around 190 000 ML/day. Locks 6 to 1 were progressively removed between late September 2022 and mid-October 2022. By early December 2022, all operable gates across all 5 barrages were opened (569 gates in total).

Following the flood peak in December 2022, the flow in the SA River Murray receded by approximately 20 000 ML/day each week until returning to within-channel (< 50 000 ML/day) in February 2023. By early February 2023, as flows receded, barrage gates and the locks and weirs were being reinstated.

At the commencement of 2023-24, High Flow conditions (as defined in the O&O) were occurring on the River Murray in South Australia and a High Flow Advice was current. Unregulated flow was still occurring along all reaches of the River Murray downstream of Hume Dam and on the Lower Darling River downstream of Menindee Lakes.

This was due to the widespread riverine flooding along the Darling and Murray Systems during 2022-23 and prolonged rainfall under La Niña conditions during 2021-22 and 2022-23 moving into the 2023-24 water year. Combined with the relatively high storage levels in the Basin for this time of year after the flood event (meaning dams have less spare capacity to mitigate inflows and spills are more likely) this indicates that High Flow conditions are likely to occur for the first part of 2023-24.

In contrast, for the 2023-24 water year the Bureau of Meteorology has forecast the return of El Niño in late winter, which indicates that drier conditions across the Murray Darling Basin may be experienced during spring and summer.

#### 4.1.2 Low Water Availability

Low water availability is not considered a risk during 2023-24.

Entitlement Flow is not expected to be impacted by the risk of delivery during 2023-24 mainly due to high storage levels in Menindee Lakes.


#### 4.1.3 Shortfall

System or delivery shortfall is not considered a risk during 2023-24.

The MDBA in collaboration with the NSW, Victorian and South Australian governments (via the WLWG) will review operations of the River Murray system throughout the year. If at any stage a material risk of a shortfall is identified, the MDBA will refer the matter to WLWG, and if advised by WLWG will seek guidance from the BOC to determine appropriate arrangements for managing shortfalls.

### 4.2 Environmental Water Delivery

Planning for the 2023-24 water year was undertaken for six water resource availability scenarios provided by the MDBA, all of which start with a QSA of approximately 35 000 ML/day in July 2023. These were based on the MDBA's modelled hydrographs that were developed in early March 2023 as data for 2023-24 scenarios were not available in time for planning and the volumes in the River Murray storages were similar to what was expected for the beginning of 2023-24 water year. An additional 'alternative dry' scenario, was also included by SA to ensure water managers were prepared under drier water availability conditions. The 'alternative dry' scenario has flows of approximately 10 000 ML/day in the first few months and then recedes to entitlement flows in the latter part of the water year.

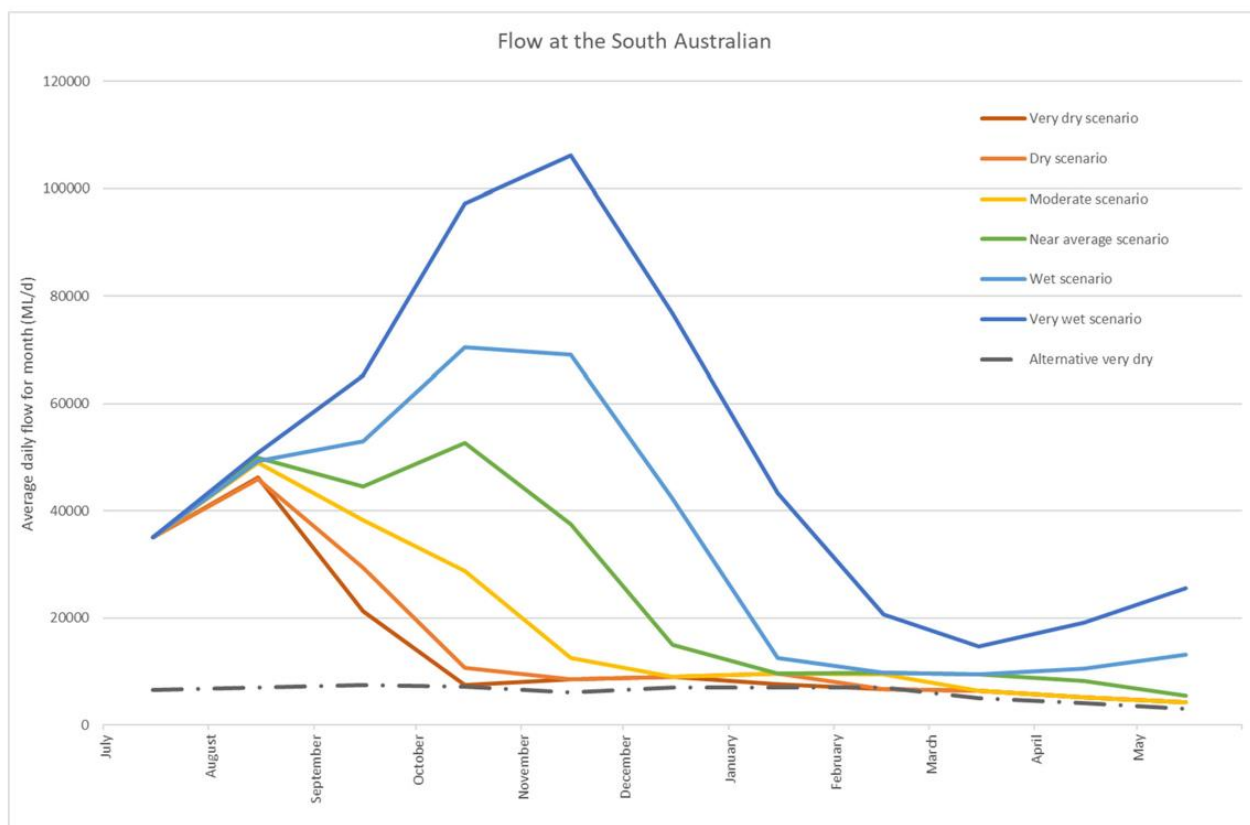

**Figure 11. Annual operating outlooks provided by the MDBA in May 2023**

River operations will facilitate where possible the delivery of WFTE to support actions identified in the WFTE Annual Plan (DEW 2023), such as:

- the operation of regulators within floodplain anabranches, e.g. Chowilla, Pike and Katarapko floodplains
- weir pool manipulations, including raising and some lowering
- river channel and floodplain water via augmentation or unregulated flow or creation of in-channel flow events (e.g. spring pulses)
- pumping and water delivery via infrastructure into temporary wetlands
- wetting and drying of managed pool connected wetlands
- Lower Lakes, Coorong and Murray Mouth (LLCMM) management, including lake level variations, lake cycling, fishway operations and barrage releases.

The WFTE Annual Plan presents the priorities for delivery and use of WFTE under the range of water availability scenarios as described above. This scenario-based approach is based on MDBA AOO and projected WFTE allocations and availability. The planning process includes the development of site based annual environmental watering proposals and a South Australian multi-site proposal describing the preferences for coordinated delivery of WFTE for all sites. WFTE delivered along the River Murray in South Australia is coordinated by DEW, with significant involvement from other government agencies including the Commonwealth Environmental Water Holder (CEWH), non-government organisations, scientific bodies and community stakeholders (**Table 4**).

**Table 4. Environmental watering proposals submitted to the MDBA and/or the CEWO for 2023-24**

Watering Proposal	Site Manager
Lower Lakes, Coorong and Murray Mouth	SA Department for Environment and Water
SA River Murray Channel and Floodplain	SA Department for Environment and Water
Chowilla Floodplain (incl. Lock 6)	SA Department for Environment and Water
Pike Floodplain (incl. Lock 5)	SA Department for Environment and Water
Katarapko Floodplain (incl. Lock 4)	SA Department for Environment and Water
Weir Pool Raising and Lowering (Locks 6 to 1)	SA Department for Environment and Water
Various wetlands along the River Murray and Lower Lakes	Murraylands and Riverland Landscape Board
Wetlands in the Renmark area	Renmark Irrigation Trust <sup>1</sup>
Banrock Station wetlands	Accolade Wines <sup>1</sup>
Calperum Station lakes and wetlands	Australian Landscape Trust <sup>1</sup>

<sup>1</sup> Non-government organisations do not complete a SCBEWC watering proposal

DEW has developed a multi-site watering proposal for 2023-24, outlining the optimal delivery of WFTE for the South Australian River Murray under a range of scenarios based on the MDBA AOO. Section 5.1 of the WFTE Annual Plan sets out the multi-site proposal and seeks to align the site-specific watering actions identified, minimise risks, maximise the effectiveness of environmental water delivery and enhance ecological outcomes throughout the system.

Adaptive management practices are undertaken, such as Integrated Operations (IO) to mitigate risks that may have adverse impacts on water quality or quantity. A number of tools have been developed to assist with the coordination of events, including the Integrated Operations Strategy (IOS) which supports the decision-making complexity associated with an increasing number of large-scale watering opportunities and a hydrological modelling platform (Source Model). Both these tools assist in the development of the annual priorities within the WFTE Annual Plan and the development of South Australia's multi-site proposal.

The estimated volume of water for the environment required to deliver the 2023-24 SA multi-site proposal ranges from approximately 618 GL in the very wet scenario (which reflects primarily CLLMM water needs) to 1 814 GL in the near average scenario. The SA multi-site volumes represent the volume of environmental water required to be delivered to the South Australian border to support all proposed watering actions in the South Australian River Murray for that scenario. These volumes are in addition to water for the environment allocated against South Australian licences (approximately 250 GL), which is delivered as part of South Australia's Entitlement and therefore included in the base flow represented in the AOO scenarios. The SA multi-site volumes factor in the contribution that the river channel water demand makes to the CLLMM water demands.

**Table 5. Indicative volume of environmental water required per month to deliver South Australia multi-site actions. Options under each scenario represent alternative demand profiles and are not cumulative**

Annual operating outlook	Indicative volume (GL) of environmental water required per month												Total est. volume 2023-24 water year only (GL)
	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	
Alternative Dry	0	0	92	289	302	225	93	58	64	61	32	0	1 215
Very Dry	0	0	1	311	301	279	62	58	63	61	32	0	1 170
Dry	0	190	85	339	300	248	93	58	63	32	33	0	1 442
Moderate	0	200	54	281	302	279	124	58	95	32	33	0	1 485
Near Average	0	0	276	217	272	320	186	140	157	122	126	0	1 814
Wet	0	0	0	256	163	344	279	84	93	60	31	0	1 311
Very Wet	0	0	0	0	0	103	248	112	124	30	0	0	618

South Australia has developed site-specific watering proposals for a number of locations throughout the SA River Murray system in the 2023-24 water year using a scenario-based approach, with the scenarios represented by the AOO planning hydrographs (see section 4.2 Environmental Delivery). A summary of site-based actions is provided the [WFTE Annual Plan](#)

(see section 5.1 and Appendix A) and provides detailed lists of all proposed actions under each water resource availability scenario, including associated volumes and ecological objectives.

### 4.3 Weir Pool Manipulations

The SA AOP and associated operational decisions will balance the impacts of weir pool manipulation within South Australia on water users, while acknowledging and exploring other opportunities to balance ecological needs with the required water supply within more flexible river management regimes. The normal operating range for each weir is described in the SA O&O.

Manipulation of weir pool water levels may be implemented for a number of reasons including:

- for environmental benefit including the wetting and drying of riparian areas and adjacent wetlands and floodplains;
- the need to supply downstream water requirements when there are very hot conditions and demands are high;
- to minimise evaporation rates;
- to temporarily store water rather than allow it to pass downstream;
- for construction and maintenance programs; and
- to provide variation in water levels to minimise bank erosion.

Potential weir pool manipulations that are being considered to be undertaken during 2023-24 to achieve environmental outcomes, including detail of potential water levels and timing for each AOO scenario, can be seen in the table below (Table 6).

**Table 6. Proposed manipulations for each weir pool in 2023-24 under the different AOO scenarios as set out in the WFTE Annual Plan.**

Annual operating outlook	Proposed manipulation for each weir pool in metres above (+) or below (-) normal pool level											
	Lock 1		Lock 2		Lock 3		Lock 4		Lock 5		Lock 6	
	Winter	Spring	Winter	Spring	Winter	Spring	Winter	Spring	Winter	Spring	Winter	Spring
<b>Very dry to Near average</b>	0.00	-0.10	0.00	-0.08	0.00	-0.03	0.00	-0.04	0.00	-0.08	0.00	-0.18
<b>Wet and Very wet</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Following the extended high flows throughout 2022, there is a need to allow areas affected by weir pool manipulation to undergo a drying phase. Much of the long-lived vegetation immediately adjacent to the river channel within the weir pool manipulation footprint has experienced significant inundation for a prolonged period of time. Not undertaking a managed inundation (via raising) will allow sediments to dry out and encourage understory vegetation recruitment. It will also reduce the risk of increasing the carp population post 2022-23 flooding.

Within 'very dry', 'dry', 'alternative dry', 'moderate' and 'near average' scenarios, modest weir pool lowering (within normal operating range at Locks 1 to 5, and potentially outside of normal operating range at Lock 6) is proposed during spring in 2023 for all six weirs to maintain and protect the lotic conditions (> 0.2 m/s) in key fast flowing habitats downstream of each weir. It is also proposed under enhanced flow conditions to support the outcomes of a spring pulse by increasing the distance of lotic conditions (> 0.2 m/s) across the whole weir pools. No manipulation is proposed in 'wet' or 'very wet' as the AOO flows exceed flows at which weirs are removed.

Proposed manipulations for each weir pool in meters above (+) or below (-) normal pool level (NPL) are provided the [WFTE Annual Plan](#) (see Appendix A) and provides detailed lists of all proposed actions under each water resource availability scenario, including associated volumes and ecological objectives.

### 4.4 Lake Victoria Directed Release

Directed releases of upper state water entitlements (such as environmental water) from Lake Victoria during unregulated flows is a strategy used to "boost" the flow to South Australia to enhance environmental outcomes. At the

commencement of the 2023–24 water year, unregulated flows were entering South Australia and are likely to continue for some months due to high volumes held in storages and wet catchment conditions.

In collaboration with environmental water holders, directed releases from Lake Victoria may be considered during 2023–24, where appropriate, particularly for targeting higher flow-rate dependent outcomes. Releases may be made to boost or extend flows or manage the rate of recession. Operational factors that may be taken into account include impacts to the planned operations of infrastructure such as floodplain regulators and locks/weirs, disruption to construction and maintenance works on the floodplain, inundation of public and private property, and future flow conditions and opportunities for releases.

## 4.5 Lower Lakes, Coorong and Murray Mouth Operations

Barrage operations are guided by the [Barrage Operating Strategy](#) (BOS) (DEW 2019b) and the [Barrage and Water Level Management Policy](#) (DEW 2019c). The BOS guides the operation of the barrages to achieve ecological outcomes for the Coorong, Lower Lakes, and Murray Mouth (CLLMM). It includes management tools, rules and procedures for the operation of barrages under different operating conditions. The BOS also provides formal decision-making processes for transparent and efficient management of barrage operations. The BOS outlines typical barrage management actions in consideration of water level and availability.

Proposed LLCMM actions for the 2023–24 water year, as submitted to Southern Connected Basin Environmental Watering Committee in 2023, are provided in the [WFTE Annual Plan](#) (see Appendix A) and provides detailed lists of all proposed actions under each water resource availability scenario, including timing, associated volumes and ecological objectives.

To achieve a targeted objective(s), there may be multiple smaller-scale operational actions that can be undertaken. Many of these operational actions are outlined in the CEWO/DEW 2023–24 watering schedule, and in subsequent 3-month forward planning documents that DEW produces for the CEWO. Actions include:

- Seasonal lake level manipulation
- Lake level cycling which involves a rapid lake level manipulation for salinity export from Lake Albert
- Targeted seasonal barrage releases to achieve outcomes in either the Murray estuary (i.e. black bream recruitment downstream of Goolwa barrage) or the Coorong (i.e. high flows from Tauwichee barrage to maintain higher water levels in spring and early summer to support *Ruppia tuberosa* recruitment).
- Increased releases from Tauwichee barrage under certain wind, tide and swell conditions to lower Coorong salinity levels
- Leaving barrage bays open during appropriately sized reversing events in spring and summer, to allow the dynamic estuarine interface zone to remain intact
- Flow releases from Salt Creek to the Coorong South Lagoon, to provide fish migration between the Coorong and the South East drainage network, and for salinity reduction in the Coorong South Lagoon.

Additional detail on proposed actions for the LLCMM is contained in the [WFTE Annual Plan](#).

## 4.6 Water Quality

Operation of floodplain regulators may introduce water quality risks (salinity, low dissolved oxygen, algae) and are monitored as per event plans to ensure that measured interventions can be undertaken.

Low-oxygen blackwater events or algae outbreaks are more likely to occur in the South Australian River Murray during summer. Blackwater is also associated with high river flows and inundation of floodplains, which has an increased likelihood of occurrence during 2023–24. For poor water quality that originates from upstream of the South Australian border, in some circumstances Lake Victoria may be used to improve water quality by diverting and/or diluting the flow in the main channel. ADF and the delivery of water for the environment in warmer months (for example, spring flows) also assist in lowering water temperature, limiting stratification, increasing mixing and therefore reducing algae outbreaks.

Salinity levels are expected to remain below targets for Lock 6, Morgan and Murray Bridge, assisted by unregulated flow. Any potential salinity impacts are difficult to predict and are highly dependent on flow conditions.

Where possible, the weir pool level downstream of Lock 1 will be maintained above +0.50 m AHD to generally retain access by irrigation pumping or diversion infrastructure, also noting that, below this level, water quality may deteriorate at some extraction points around the Lower Lakes.

Refer to the SA O&O for more detail on water quality targets and obligations.

## 4.7 Deferral, Storage and Delivery of South Australia's Storage Right

In accordance with the South Australian River Murray Water Resource Plan, South Australia aims to have up to an equivalent of 150 percent (306 GL) of its annual CHWN in storage, in case it is required ahead of a year with less than 1 850 GL of Entitlement Flow available.

Any proposed changes to the delivery of the monthly Entitlement Flow to South Australia and the use of South Australia's Storage Right under Schedule G of the Agreement will be identified through the Deferred Water Storage and Delivery Plan, which is updated on a monthly basis.

On 1 July 2023, South Australia had a total of 0 GL of deferred water stored in accordance with Schedule G of the Agreement, as shown in **Table 2**. In August 2022 due to the unprecedented increased flows in the Murray-Darling Basin pre-releases began at Dartmouth Dam where the total 336.2 GL of South Australia's deferred water was stored. In accordance with Schedule G of the Agreement South Australia's Storage Right is the first to spill when dam storages begin pre-releases or spill. By October 2022 the total volume stored in the Storage Right had spilled. The 2023-24 water year will be used to rebuild South Australia's Storage Right.

### 4.7.1 Deferral

South Australia's Deferred Water Storage and Delivery Plan for July 2023 has proposed the deferral of 85 GL of Entitlement Flow between November 2023 and April 2024. Of this volume 64.5 GL will be set aside for CHWN and 20.5 GL for Private Carryover. All deferral volumes are subject to operational constraints and approvals.

Deferral and storage of Entitlement Flow will only be undertaken if practical under prevailing conditions. South Australia's preferred storage is Dartmouth Dam. Actual deferrals may be limited during 2023-24 due to the anticipated periods of unregulated flow and the reduced likelihood of bulk water transfers between Hume Dam and Lake Victoria because of high storage levels in Menindee Lakes.

### 4.7.2 Delivery

With full South Australian Entitlement South Australia will not need to request delivery of any deferred water in storage (providing there are volumes in storage).

## 5 Glossary of Terms Used

**Additional Dilution Flow (ADF):** is released to South Australia at a rate of 3 GL/day once storage volumes in Hume and Dartmouth and the Menindee Lakes Scheme exceed specified triggers. Delivery of ADF continues while the trigger levels are maintained.

**Annual Exceedance Probabilities (AEP):** represents the percentage likelihood of a flow, or greater flow, occurring based on the historical record

**Conveyance Reserve:** for a year, means water set aside by the MDBA to supply conveyance water for the following year, determined in accordance with clause 102 D of the Agreement

**Conveyance Water:** is the volume required to physically deliver water to where it is needed for use such as CHWN.

**Critical human water needs (CHWN):** is the minimum amount of water required to meet core human consumption requirements in urban and rural areas; and those non-human consumption requirements that a failure to meet would cause prohibitively high social, economic or national security costs

**Deferred water:** Water that South Australia has requested the MDBA to not deliver and instead store in upstream storages under Schedule G of the Agreement. South Australia can request this water to be delivered in a subsequent dry year

**Entitlement Flow:** minimum monthly River Murray flow to South Australia specified in clause 88 of the Agreement

**Environmental flow:** any change to the flow regime that is intended to maintain and improve river health. It seeks to make better use of the water currently available in the system, as well as any new water made available, for the environment

**Gigalitre (GL):** 1 gigalitre is a thousand million (1 000 000 000) litres or 1 000 megalitres. 1 gigalitre would cover Adelaide oval to a depth of 50 metres (about a 15-storey building)

**Integrated Operations (IO):** a term used to describe the coordination of water delivery to South Australia with large scale environmental watering involving infrastructure operation, to manage the potential risks of adverse impacts and, where possible, achieve cumulative benefits across the South Australian River Murray.

**Megalitre (ML):** 1 megalitre is one million litres (about half an Olympic swimming pool)

**Private carryover:** means a volume of allocation made available in a year for use under an entitlement and not used in the year, but that may be made available to the holder of the entitlement for use in a subsequent dry year (clause 2 of the Agreement)

**Salinity:** concentration of salts in soil or water, usually sodium chloride

**South Australia's Storage Right:** South Australia's limited right to defer a portion of its Entitlement Flow and store it in the Murray-Darling Basin storages for delivery in a future dry year, which is set out by Schedule G of the Agreement

**The Agreement:** The Murray-Darling Basin Agreement, incorporated in the *Water Act 2007* (Cwth)

**Unregulated flow:** flow to South Australia that cannot be captured (regulated) in Lake Victoria. Unregulated flow is preserved for the purpose of achieving environmental outcomes unless required in emergency circumstances

**Water access entitlement holder:** a natural person or body corporate that holds the right to a share of the consumptive pool for the River Murray Prescribed Watercourse

**Weir pool:** water that is held back by the presence of a weir

**Wetland:** land inundated with temporary or permanent water that is usually slow moving or stationary, shallow and either fresh, brackish or saline



## 6 Glossary of Acronyms Used

ADF	Additional Dilution Flow
AEP	Annual Exceedance Probabilities
AHD	Australian Height Datum
AOO	Annual Operating Outlook
BOC	Basin Officials Committee
BOM	Bureau of Meteorology
BOS	Barrage Operating Strategy
CEWH	Commonwealth Environmental Water Holder
CHWN	Critical Human Water Needs
DEW	Department for Environment and Water
EC	Electrical Conductivity
EWB	Environmental Watering Requirements
FSL	Full Supply Level
GL	Gigalitres
LLCMM	Lower Lakes, Coorong and Murray Mouth
LTWP	Long-Term environmental Watering Plan
m	metres
MDBA	Murray-Darling Basin Authority
NOR	Normal Operating Range
NPL	Normal Pool Level
ML	Megalitres
PIRSA	Primary Industries and Regions South Australia
PPT	Parts per Thousand
QSA	Calculated River Murray flow at the South Australian border (gauging station A4261001)
RMOWG	River Murray Operations Working Group
SA AOP	South Australia's River Murray Annual Operating Plan
SA O&O	Objectives and Outcomes for Operating the River Murray in South Australia

SA Water	South Australian Water Corporation
WFTE	Water for the Environment
WLWG	Water Liaison Working Group

## 7 References

Department for Environment and Water (DEW) 2019a, *South Australian River Murray Water Resource Plan*, Government of South Australia, Adelaide

Department for Environment and Water (DEW) 2019b, *Barrage Operating Strategy*, Government of South Australia, Adelaide

Department for Environment and Water (DEW) 2019c, *Barrage and Water Level Management Policy*, Government of South Australia, Adelaide

Department for Environment and Water (DEW) 2020, *Long-term environmental watering plan for the South Australian River Murray water resource plan area*, Government of South Australia, Adelaide

Department for Environment and Water (DEW) 2021, *Objectives and Outcomes for Operating the River Murray in South Australia*, Government of South Australia, Adelaide

Department for Environment and Water (DEW) 2023, *2023-24 Water for the Environment Annual Plan for the South Australian River Murray*, Government of South Australia, Adelaide

Murray-Darling Basin Authority (MDBA) 2012, *Basin Plan*, Commonwealth of Australia, Canberra, Compilation date 5 August 2021, Authorised Version F2021C01067, Registered 27/10/2021, Prepared by the Office of Parliamentary Counsel, Canberra

Murray-Darling Basin Authority (MDBA) 2014, *Drought Emergency Framework for Lakes Alexandrina and Albert*, Murray-Darling Basin Authority, Canberra.

Murray-Darling Basin Authority (MDBA) 2019, *Basin-wide environmental watering strategy*, Murray-Darling Basin Authority, Canberra

Murray-Darling Basin Authority (MDBA) 2023, *River Murray System Annual Operating Outlook 2023-24 water year*, Murray-Darling Basin Authority, Canberra

National Health and Medical Research Council 2013, *Australian Drinking Water Guidelines Paper 6 National Water Quality Management Strategy*, Version 2.0, National Health and Medical Research Council, National Resource Management Ministerial Council, Commonwealth of Australia, Canberra

Murraylands and Riverland Landscape Board 2021, *Water Allocation Plan for the River Murray Prescribed Watercourse*, Government of South Australia, Adelaide

*Water Act 2007* (Cwth)

Published by the Department for Environment and Water  
Government of South Australia  
August 2023

Head Office  
Level 5  
81-95 Waymouth Street  
ADELAIDE SA 5000

Telephone+61 (8) 8463 6862

Report prepared by:  
River Murray Operations Working Group  
Chaired by the Water Delivery Group  
Water Infrastructure and Operations  
Water and River Murray Division

[www.environment.sa.gov.au](http://www.environment.sa.gov.au)



With the exception of the Piping Shrike emblem, other material or devices protected by Aboriginal rights or a trademark, and subject to review by the Government of South Australia at all times, the content of this document is licensed under the Creative Commons Attribution 4.0 Licence. All other rights are reserved.

© Crown in right of the State of South Australia | 2023-24

Front cover photo credit: DEW



**Government  
of South Australia**

Department for  
Environment and Water